


## Needle roller bearing GBRI122416-UU-IKO - GBRI122416-UU-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/needle/gbri122416-uu-iko>

**IKO**  
**MACHINED TYPE NEEDLE ROLLER BEARINGS**  
With Seal, With Inner Ring, Inch Series

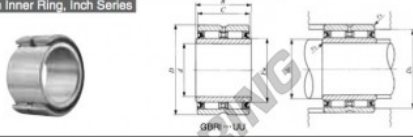

Shaft dia. mm (inch)	Identification number				Mass (Ref.) g	Boundary dimensions mm(inch)			
	With two seals		With one seal			d	D	C	
19.050 (3/4)	<b>GBRI 122416 UU</b>				143	19.050 (3/4)	38.100 (1 1/2)	25.400 (1)	
B	F <sub>w</sub>	Standard mounting dimensions - mm			Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Allowable rotational speed <sup>(2)</sup> rpm	Assembled inner ring	
		Min.	Max.	D <sub>s</sub> Max.					r <sub>as max</sub> <sup>(1)</sup>
25.650	25.400 (1)	24	24.4	33.3	0.6	31 000	46 100	3 000	<b>LRBZ 121616</b>

Notes: (1) Minimum allowable value of chamfer dimension r.  
(2) Allowable rotational speed applies to grease lubrication.  
Remark: This roller ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952384610
Inside diameter	19.05 mm
Inside diameter	3/4" inch
Outside diameter	38.1 mm
Outside diameter	1 1/2" inch
Thickness	25.4 mm
Thickness	1" inch
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE