


## Needle roller bearing NAF659530-IKO - NAF659530-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/needle/naf659530-iko>

**IKO**  
**NEEDLE ROLLER BEARINGS WITH SEPARABLE CAGE**  
With Inner Ring

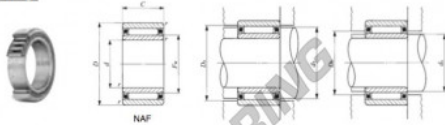

Shaft dia. mm	Identification number	Mass (Ref.) g	Boundary dimensions mm					Standard mounting dimensions mm				
			$d$	$D$	$C$	$r_s$ min <sup>(1)</sup>	$F_w$	$d_b$	$D_s$ Max.	$d_s$ Min.	$D_b$ Max.	
65	NAF 659530	790	65	95	30	1.5	75	82	87	73	73.5	76
Basic dynamic load rating $C$		Basic static load rating $C_0$		Allowable rotational speed <sup>(2)</sup>		Assembled roller ring						
N		N		rpm		LRT 657530						
63 100		144 000		6 500								

Notes: (1) Minimum allowable value of chamfer dimension  $r$ . (2) Allowable rotational speed applies to grease lubrication.  
Remark: The outer ring has an oil groove and an oil hole.  
2. Bearings with seals on both sides are provided with prepacked grease. Bearings with a seal on one side are not provided with prepacked grease. Perform proper lubrication for use.

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952384832
Inside diameter	65 mm
Outside diameter	95 mm
Thickness	30 mm
Weight	790 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE