


GE Rod end GE220ES-IKO - GE220ES-IKO

<https://www.123bearing.com/bearing-housing/rod-end/ge/ge220es-iko>

SPHERICAL BUSHINGS
steel Spherical Bushings

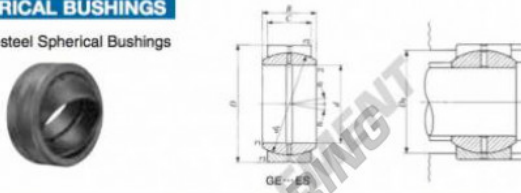

Identification number		Mass (Ref.) kg	Boundary dimensions mm						Per mitt ε
Without seals	With seals		d	D	B	C	d _k	r _{1s} min ⁽¹⁾	
GE 220ES		36.1	220	320	135	100	275	1.1	1.1

Mounting dimensions mm			Dynamic load capacity C _D N	Static load capacity C _S N
Max. ⁽²⁾	Max.	Min.		
239.5	313	269	2 700 000	16 200 000

Minimum allowable value of chamfer dimensions r₁ and r₂
When Spherical Bushings are used with full filling angle, the shaft shoulder dimension must be less than the maximum value.
The inner ring and the outer ring have an oil groove and two oil holes, respectively.
Not provided with prepacked grease. Perform proper lubrication for use.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952392080
Inside diameter	220 mm
Outside diameter	320 mm
Thickness	135 mm
Type	GE
Lubrication	without
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE