


GE Rod end GE60EC-2RS-IKO - GE60EC-2RS-IKO

<https://www.123bearing.com/bearing-housing/rod-end/ge/ge60ec-2rs-iko>

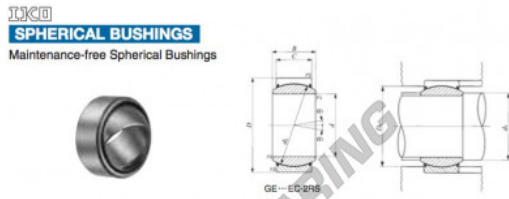

Shaft dia. mm	Identification number		Mass (Ref.) kg	Boundary dimensions mm						Permissible tilting angle degree		
	Without seals	With seals		d	D	B	C	d _k	r ₁ mm	r ₂ mm	α	α ₁
60	—	GE 60EC-2RS	1,10	60	90	44	36	80	1	1	—	3
Mounting dimensions mm			Dynamic load capacity C _d		Static load capacity C _s							
d _s		D _s		N		N						
Min.	Max. ⁽¹⁾	Max.	Min.	N		N						
65.5	66.5	84.5	79	282 000		706 000						

Notes⁽¹⁾ Minimum allowable value of chamfer dimensions r₁ and r₂
⁽²⁾ When Spherical Bushings are used with full tilting angle, the shaft shoulder dimension must be less than the maximum value of d_s.
 Remark No oil hole is provided.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952393223
Inside diameter	60 mm
Outside diameter	90 mm
Thickness	44 mm
Type	GE
Lubrication	without
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE