


Cam follower CF12-1-VBUUR-IKO - CF12-1-VBUUR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cf12-1-vbuur-iko>



CAM FOLLOWERS

Standard Type Cam Followers Full Complement Type/With Hexagon Hole

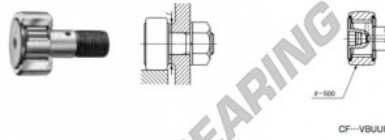

Stud dia. mm	Identification number								Mass (Ref.)				
	Shield type				Sealed type				g	D	C	d ₁	
	With crowned outer ring		With cylindrical outer ring		With crowned outer ring		With cylindrical outer ring						
12	CF 12-1 VBUUR								107	32	14	12	

Boundary dimensions mm											Mounting dimension f Min. mm	Maximum tightening torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N
G	G ₁	B max	B ₁ max	B ₂	B ₃	C ₁	g ₁	g ₂	H	H _{max}					
M12×1.5	13	15.2	40.2	25	6	0.6	6	3	6	0.6	21	21.9	13 500	19 700	13 200

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952442044
Inside diameter	12 mm
Inside diameter	0.472" inch
Outside diameter	32 mm
Outside diameter	1.26" inch
Thickness	14 mm
Thickness	0.551" inch
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE