


Cam follower CFES8-B-IKO - CFES8-B-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfes8-b-iko>



CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers **With Cage/With Hexagon Hole**

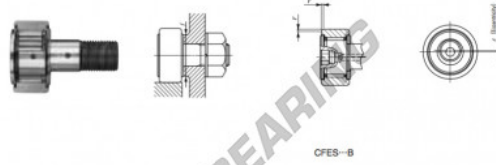

CFES-B

Stud dia. mm	Identification number						Mass (Ref.) g	D	C	d ₁						
	Shield type		Sealed type													
8	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring			28.5	19	11	8						
	CFES 8 B															
Boundary dimensions mm																
G	G ₁	B	B ₁ max	B ₂ max	B ₃	C ₁	g ₁	g ₂	H	ε ^(°) K _{max}	Mounting dimension f Min. mm	Maximum spinning torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
M 8×1.25	10	12.2	32.2	20	—	0.6	—	—	4	0.3	0.25	13	6.5	4 250	4 740	4 670

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952443416
Inside diameter	8 mm
Outside diameter	19 mm
Thickness	11 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE