


Cam follower CFES16-UU-IKO - CFES16-UU-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfes16-uu-iko>

IKO

CAM FOLLOWERS

Solid Eccentric Stud Type Cam Followers With Cage/With Screwdriver Slot

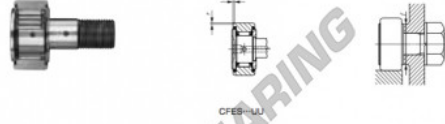

Stud dia. mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d ₁
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With crowned outer ring	With cylindrical outer ring	With cylindrical outer ring				
16						CFES 16 UU	170	35	18	16

Boundary dimensions mm										Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N	
G	G ₁	B	B ₁	B ₂	B ₃	C ₁	B ₁	B ₂	B ₃						
M16×1.5	17	19.6	52.1	32.5	8	0.8	6	3	0.6	0.5	26	58.5	12 000	18 300	18 300

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060459312
Inside diameter	16 mm
Outside diameter	35 mm
Thickness	18 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE