


## Cam follower CFE30-IKO - CFE30-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfe30-iko>

IKO

### CAM FOLLOWERS

Eccentric Type Cam Followers With Cage/With Screwdriver Slot

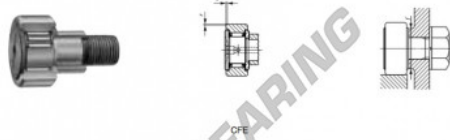

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			g	D	C	d <sub>2</sub>
	With crowned outer ring	With cylindrical outer ring	CFE 30	With crowned outer ring	With cylindrical outer ring					
41							2 030	80	35	41

Boundary dimensions mm										Essentiality	Mounting dimension f Min. mm	Maximum tightening torque N-m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N
G	B <sub>3</sub>	B max	B <sub>1</sub> max	B <sub>2</sub>	C <sub>1</sub>	G <sub>1</sub>	(1) r/min	e	g						
M30×1.5	32.5	37	100	63	1	8	30.5	1	1.5	49	438	45 400	85 100	85 100	

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460189
Inside diameter	41 mm
Inside diameter	1.614" inch
Outside diameter	80 mm
Outside diameter	3.15" inch
Thickness	35 mm
Thickness	1.378" inch
Weight	2030000 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE