


## Cam follower CFE24-VBUUR-IKO - CFE24-VBUUR-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfe24-vbuur-iko>

**IKO**

**CAM FOLLOWERS**

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

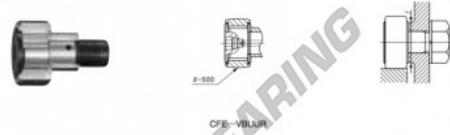

Outside diameter of eccentric collar mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			Ø	D	C	d <sub>e</sub>
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
<b>33</b>	<b>CFE 24</b>			<b>VBUUR</b>			900	62	29	33

Boundary dimensions mm															
G	B <sub>3</sub>	B <sub>1</sub> max	B <sub>2</sub> max	C <sub>1</sub>	G <sub>1</sub>	H	H <sub>1</sub> <sup>(*)</sup>	Eccentricity g	Mounting dimension f Min. mm	Maximum splining torque N·m	Basic dynamic load rating C N	Basic static load rating C <sub>0</sub> N	Maximum allowable static load N		
M24×1.5	25.5	30.6	80.1	49.5	0.8	8	24	12	1	0.8	40	215	46 600	92 000	52 000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460707
Inside diameter	33 mm
Outside diameter	62 mm
Thickness	29 mm
Weight	900 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE