


Cam follower CFE30-VB-IKO - CFE30-VB-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/cfe30-vb-iko>

IKO

CAM FOLLOWERS

Eccentric Type Cam Followers Full Complement Type/With Hexagon Hole

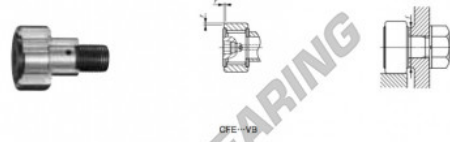

Outside diameter of eccentric roller mm	Identification number						Mass (Ref.)			
	Shield type			Sealed type			ø	D	C	d _e
	With crowned outer ring	With cylindrical outer ring	With crowned outer ring	With cylindrical outer ring						
41	CFE 30 VB						2 030	80	35	41

Boundary dimensions mm															
G	B ₃	B ₁ max	B ₂ max	C ₁	G ₁	H	H _{max} (°)	f	Mounting dimension g	Maximum splining torque N·m	Basic dynamic load rating C N	Basic static load rating C ₀ N	Maximum allowable static load N		
M30×1.5	32.5	37	100	63	1	8	30.5	17	1	1.5	49	438	67 700	144 000	85 900

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060460776
Inside diameter	41 mm
Inside diameter	1.614" inch
Outside diameter	80 mm
Outside diameter	3.15" inch
Thickness	35 mm
Thickness	1.378" inch
Weight	2030 g
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE