


## Cam follower CRH28-V-IKO - CRH28-V-IKO

<https://www.123bearing.com/bearing-housing/deep-groove-bearing/cam-follower/crh28-v-iko>

IKO

### CAM FOLLOWERS

Inch Series Heavy Duty Cam Followers Full Complement Type/With Screwdriver Slot

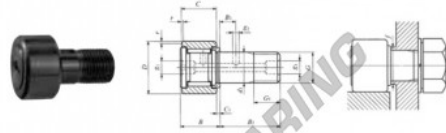

Stud dia. mm (inch)	Identification number		Mass (Ref.) g	D	C	d <sub>1</sub>	G LINE	G <sub>1</sub>	B max
	Shield type	Sealed type							
25.400 (1)	CRH 28	V	463	44.450 (1) $\frac{1}{2}$	25.400 (1)	25.400 (1)	1-14 UNS	22.225 $\frac{7}{8}$	27.4-1.08
Boundary dimensions mm(inch)				Mounting dimension f Min. mm(inch)	Maximum operating temp C	Basic dynamic load rating C <sub>10</sub>	Basic static load rating C <sub>0</sub>		
B <sub>2</sub>	B <sub>3</sub>	C <sub>1</sub>	S <sub>1</sub>					S <sub>2</sub>	r
44.450 (1) $\frac{1}{2}$	11.112 $\frac{7}{8}$	1.588 $\frac{1}{4}$	4.762 $\frac{3}{8}$	2.381 $\frac{1}{4}$	1.588 $\frac{1}{4}$	32.841 (1) $\frac{1}{2}$	258	35 300	55 600

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060464699
Inside diameter	25.4 mm
Outside diameter	44.45 mm
Thickness	25.4 mm
Weight	463 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE