

TAPR Rod end GIHN-KL-20LO-DURBAL - GIHN-KL-20LO-DURBAL


<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihn-kl-20lo-durbal>

GIHN-KL-20LO



Description: Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

* without grease nipple

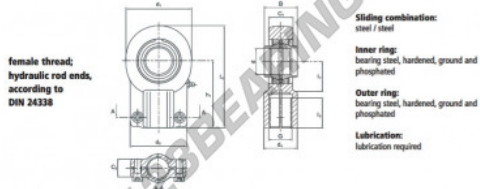

female thread;
hydraulic rod ends,
according to
DIN 24338

Sliding combination:
steel / steel

Inner ring:
bearing steel, hardened, ground and
phosphated

Outer ring:
bearing steel, hardened, ground and
phosphated

Lubrication:
lubrication required

order number	d	d ₁	G	d ₂	B	C ₁	C ₂
GIHN-KL 20 LO	20	47	M 16 x 1,5	25,0	47	20	17

type	l ₁ min	h	l ₂	l ₁	load rating C ₀ (N)	weight (kg)
GIHN-K / GIHN-KL 20 LO	23	52	77,0	22	48,0	0,40

PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500119
Inside diameter	20 mm
Inside diameter	0.787" inch
Outside diameter	47 mm
Outside diameter	1.85" inch
Thickness	17 mm
Thickness	0.669" inch
Type	TAPR
Weight	400 g
Thread	Left-hand thread
Lubrication	with
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE