


Drawn cup roller bearing YTL59-IKO - YTL59-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ytl59-iko>

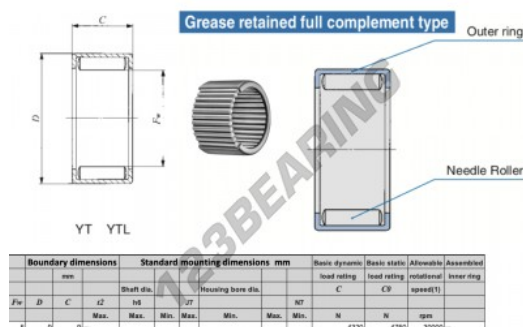

Boundary dimensions		Standard mounting dimensions mm								Basic dynamic load rating		Basic static load rating		Allowable rotational speed (1)	Assembled inner ring
mm		Shaft dia.		Housing bore dia.		HT		C		CP		rpm			
F ₀	D	C	d2	hd	J7	Housing bore dia.	HT	C	CP	N	N	rpm			
5	9	9	Max.	Max.	Min.	Max.	Min.	Max.	Min.	4320	4750	30000	--		

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060598691
Inside diameter	5 mm
Inside diameter	0.197" inch
Outside diameter	9 mm
Outside diameter	0.354" inch
Thickness	9 mm
Thickness	0.354" inch
Limiting speed	30000 rpm
Dynamic load	4.32 kN
Static load	4.75 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE