


## Drawn cup roller bearing TAM3015-IKO - TAM3015-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/tam3015-iko>

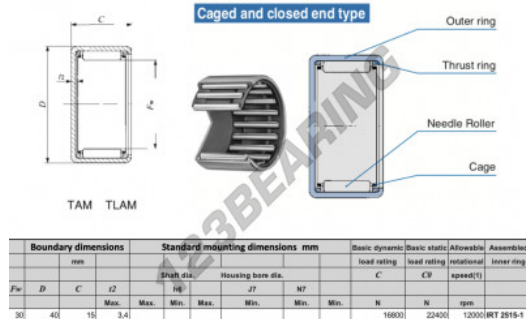

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(1)	Assembled inner ring
Fr	D	C	Shaft dia. H7		Housing bore dia. N7				C	CF	rpm			
	Max.	Max.	Min.	Max.	Min.	Min.	Min.	N	N	rpm				
30	40	15	3,4					16800	22400	12000		RT 2515-1		

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599483
Inside diameter	30 mm
Outside diameter	40 mm
Thickness	15 mm
Limiting speed	12000 rpm
Dynamic load	16.8 kN
Static load	22.4 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE