


## Drawn cup roller bearing TAM3525-IKO - TAM3525-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/tam3525-iko>

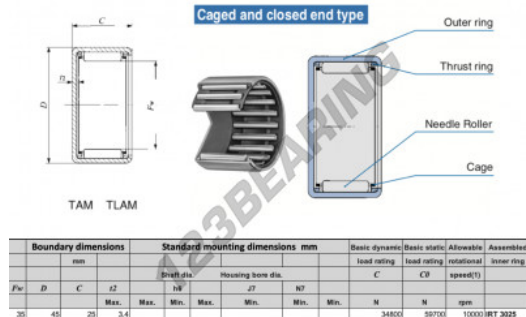

Boundary dimensions			Standard mounting dimensions mm						Basic dynamic load rating	Basic static load rating	Allowable rotational speed(U)	Assembled inner ring
mm			Bore dia.		Housing bore dia.				C	CP		
Pw	D	C	d2	TW	J7	H7	N7	Min.	M	M	rpm	
35	45	25	3.4	Max.	Min.	Max.	Min.	Min.	34800	59700	10000	BT 3025

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599568
Inside diameter	35 mm
Outside diameter	45 mm
Thickness	25 mm
Limiting speed	10000 rpm
Dynamic load	34.8 kN
Static load	59.7 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE