


Drawn cup roller bearing TAM5520-IKO - TAM5520-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/tam5520-iko>

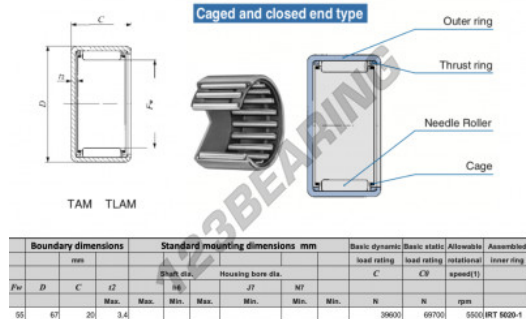

Pr	Boundary dimensions		Standard mounting dimensions mm						Basic dynamic load rating		Basic static load rating		Allowable rotational speed(V)	Assembled inner ring
	D	C	Bore dia.		Housing bore dia.		C		CP					
	mm	mm	Min.	Max.	Min.	Max.	Min.	Max.	N	N	rpm			
55	67	20	3.4						39600	69700	5500	RT 8020-1		

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060599872
Inside diameter	55 mm
Outside diameter	67 mm
Thickness	20 mm
Limiting speed	5500 rpm
Dynamic load	39.6 kN
Static load	69.7 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE