


## Drawn cup roller bearing BHAM88-IKO - BHAM88-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/bham88-iko>

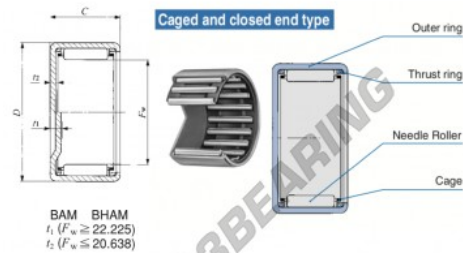

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable axial displacement	
Fw	D	C	f	H	J	C		CF		mm(0.01)	mm(0.001)
						Max.	Min.	Max.	Min.		
12 708 (12)	19.050 (0.75)	12.700 (0.50)	1.20			Max.	Min.	6.04	6.65	30000	88 58

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060600233
Inside diameter	12.7 mm
Outside diameter	19.05 mm
Thickness	12.7 mm
Limiting speed	30000 rpm
Dynamic load	6.04 kN
Static load	6.65 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE