


## Drawn cup roller bearing BHAM1610-IKO - BHAM1610-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/bham1610-iko>

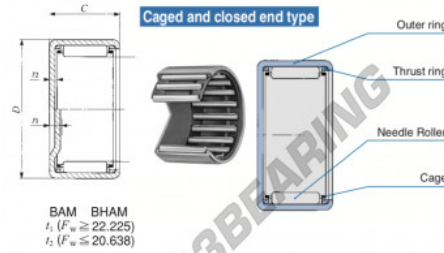

| Boundary dimensions mm(inch) |        |        |      | Standard mounting dimensions mm |       |       |       | Basic dynamic load rating |        | Basic static load rating |       | Limiting speed |       |
|------------------------------|--------|--------|------|---------------------------------|-------|-------|-------|---------------------------|--------|--------------------------|-------|----------------|-------|
| $F_w$                        | $D$    | $C$    | $t$  | $t_1$                           | $t_2$ | $t_3$ | $t_4$ | $C$                       | $C_0$  | $C_0$                    | $C_0$ | $n$            | $n_0$ |
| 25.400                       | 33.338 | 15.881 | 3.41 | Max.                            | Min.  | Max.  | Min.  | 15.300                    | 22.100 | 22.100                   | 15000 | —              | —     |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060600431 |
| Inside diameter  | 25.4 mm       |
| Outside diameter | 33.338 mm     |
| Thickness        | 15.88 mm      |
| Limiting speed   | 15000 rpm     |
| Dynamic load     | 15.3 kN       |
| Static load      | 22.1 kN       |
| Packaging        | 1             |

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE