


## Drawn cup roller bearing BHAM2220-IKO - BHAM2220-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/bham2220-iko>

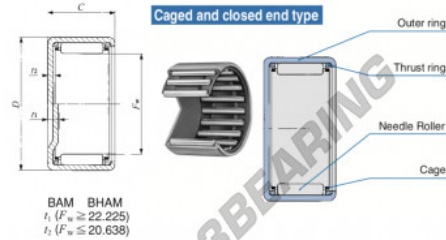

| Boundary dimensions mm(inch) |              |              | Standard mounting dimensions mm |                |                | Basic diameter | Basic width | Adjusted | Adjusted   |
|------------------------------|--------------|--------------|---------------------------------|----------------|----------------|----------------|-------------|----------|------------|
| $F_w$                        | B            | C            | t                               | t <sub>1</sub> | t <sub>2</sub> | C              | CP          | external | inner ring |
|                              | Max.         | Min.         | Max.                            | Min.           | Max.           | Min.           | Max.        | Min.     | Max.       |
| 34.925 (1.44)                | 44.45 (1.74) | 31.75 (1.25) | 3.41                            |                |                | 41.200         | 14.200      | 15.000   | 14.800     |

### PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060600684 |
| Inside diameter  | 34.925 mm     |
| Inside diameter  | 1 3/8" inch   |
| Outside diameter | 44.45 mm      |
| Outside diameter | 1 3/4" inch   |
| Thickness        | 31.75 mm      |
| Thickness        | 1 1/4" inch   |
| Limiting speed   | 10000 rpm     |
| Dynamic load     | 41.2 kN       |
| Static load      | 74.2 kN       |
| Packaging        | 1             |

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE