


Drawn cup roller bearing BA1614-Z-IKO - BA1614-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1614-z-iko>

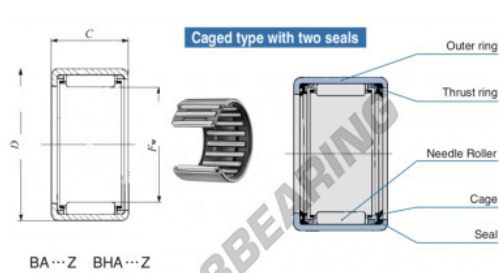

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	a_2	a_6	Shaft dia.	Housing bore dia.	C	C_0	n	n_0
			Min.	Max.	Min.	Max.	Min.	Max.	r/min	RB 1214
25.400	1.31750 (1.14)	22.220 (875)	2.8	25.400	25.387	31.764 (8888)	16900	30400	15000	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601193
Inside diameter	25.4 mm
Outside diameter	31.75 mm
Thickness	22.22 mm
Limiting speed	15000 rpm
Dynamic load	16.9 kN
Static load	30.4 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE