


Drawn cup roller bearing BA1812-Z-IKO - BA1812-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1812-z-iko>

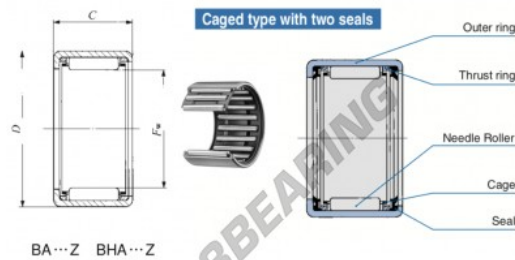

Boundary dimensions mm[inch]			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed ¹⁾	Assembled inner ring
F _w	D	C	r ₁	Shaft dia. h6		Housing bore dia. J7		C	CP	N	N	rpm
				Max.	Min.	Max.	Min.					
28.825 (1.1348)	34.925 (1.375)	19.05 (0.75)	2.8					15000	26900	13000	RB 1412	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601261
Inside diameter	28.575 mm
Outside diameter	34.925 mm
Thickness	19.05 mm
Limiting speed	13000 rpm
Dynamic load	15 kN
Static load	26.9 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE