


Drawn cup roller bearing BA1910-Z-IKO - BA1910-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1910-z-iko>

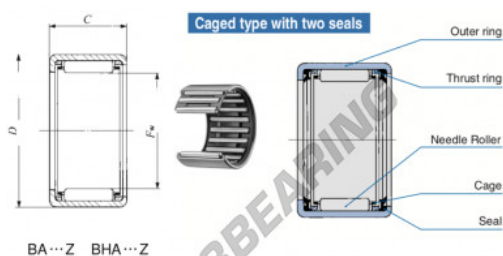

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed ⁽¹⁾		Assembled inner ring
F_w	D	C	d_2	H_6	Housing bore dia. J_7		C	C_0	n	n_0			
			Max.	Max.	Min.	Max.	Min.	n	n_0				
30.162	1.38.100	1.12	15.88	6.25	2.8				15000	22500	12000	—	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601292
Inside diameter	30.162 mm
Inside diameter	1 3/16" inch
Outside diameter	38.1 mm
Outside diameter	1 1/2" inch
Thickness	15.88 mm
Thickness	5/8" inch
Limiting speed	12000 rpm
Dynamic load	15 kN
Static load	22.5 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE