


## Drawn cup roller bearing BA228-Z-IKO - BA228-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba228-z-iko>

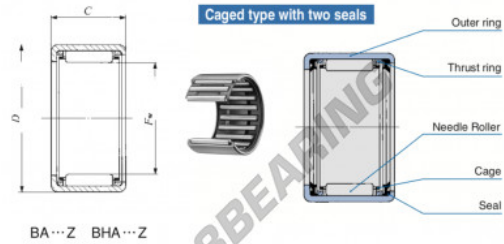

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
$F_w$	$D$	$C$	Shaft dia. $d$	Housing bore dia. $D_f$	$C$	$CW$	$C$	$N$	$N$	
Min.	Max.	Min.	Min.	Max.	Min.	Max.	N	N	rpm	
34.925 (1.373)	41.275 (1.625)	12.701 (500)	2.8				9770	16600	10000	IRB 188

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601384
Inside diameter	34.925 mm
Outside diameter	41.275 mm
Thickness	12.7 mm
Limiting speed	10000 rpm
Dynamic load	9.77 kN
Static load	16.6 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE