


## Drawn cup roller bearing BA2414-Z-IKO - BA2414-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba2414-z-iko>

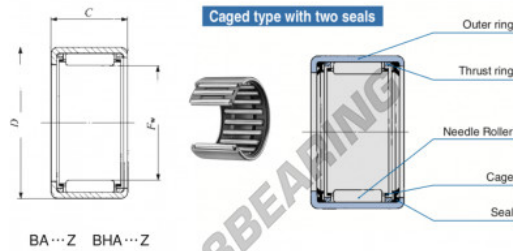

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed <sup>(1)</sup>	Assembled inner ring
$F_w$	$D$	$C$	$d_1$	$d_2$	$d_3$	$d_4$	$C$	$C_0$		
			Min.	Max.	Min.	Max.	Min.	Min.	rpm	
BA 100	(1.12)	47.625	(1.48)	22.22	(.875)	2.6				
								26700	45400	
									9000	

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601452
Inside diameter	38.1 mm
Outside diameter	47.625 mm
Thickness	22.22 mm
Limiting speed	9000 rpm
Dynamic load	26.7 kN
Static load	45.6 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE