


Drawn cup roller bearing BA2610-Z-IKO - BA2610-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba2610-z-iko>

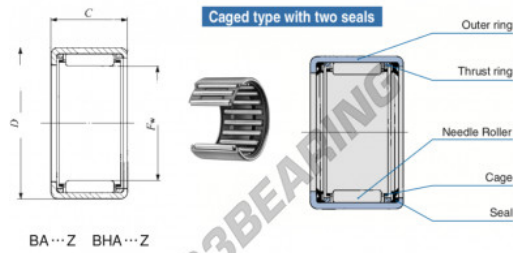

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
<i>P₀</i>	<i>D</i>	<i>C</i>	<i>d</i>	<i>H</i>	<i>J</i>	<i>C</i>	<i>C₀</i>	rpm		
41.275 (1.621)	50.8 (2.000)	15.88 (0.625)	41.275 (1.621)	50.8 (2.000)	15.88 (0.625)	18900	30000	8000	ISO 2218	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601490
Inside diameter	41.275 mm
Outside diameter	50.8 mm
Thickness	15.88 mm
Limiting speed	8000 rpm
Dynamic load	18.9 kN
Static load	30 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE