


Drawn cup roller bearing BA2816-Z-IKO - BA2816-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba2816-z-iko>

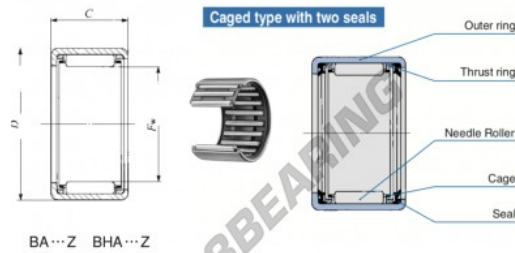

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(1)	Assembled inner ring
P_w	D	C	d_2	h_2	d_1	d_1	C	C_0	n	n_{gr}
			Min.	Min.	Min.	Max.	Min.	N	N	rpm
44.450 (1.748)	53.975 (2.125)	25.40(1.000)	2.8					34800	67400	7500 (RB 2416)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601520
Inside diameter	44.45 mm
Outside diameter	53.975 mm
Thickness	25.4 mm
Limiting speed	7500 rpm
Dynamic load	34.8 kN
Static load	67.4 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE