


## Drawn cup roller bearing BA3016-Z-IKO - BA3016-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba3016-z-iko>

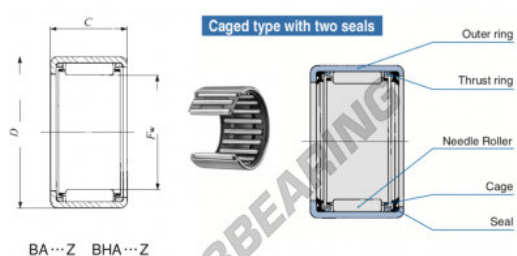

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(I)	Assembled inner ring
$P_w$	$D$	$C$	$c_2$	$h_6$	$J_7$	$C$	$C_0$	$n$	$N$	$r_{min}$
			Min.	Max.	Min.	Max.		N	N	rpm
47.625	15.48	150	12.14	25.40	1.000	2.8		95400	70400	7000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601568
Inside diameter	47.625 mm
Inside diameter	1 7/8" inch
Outside diameter	57.15 mm
Outside diameter	2 1/4" inch
Thickness	25.4 mm
Thickness	1" inch
Limiting speed	7000 rpm
Dynamic load	35.4 kN
Static load	70.6 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE