


Drawn cup roller bearing BA3216-Z-IKO - BA3216-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba3216-z-iko>

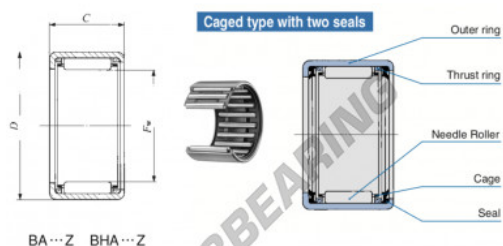

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable rotational speed	Assembled inner ring
For	D	C	d	H	h	C	C	CP	rpm			
50.800 (2")	60.325 (2 3/8")	25.401 (1.000)	Min.	Max.	Min.	Max.	Min.	N	N	rpm	6000 (RB 2818)	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601582
Inside diameter	50.8 mm
Inside diameter	2" inch
Outside diameter	60.325 mm
Outside diameter	2 3/8" inch
Thickness	25.4 mm
Thickness	1" inch
Limiting speed	6000 rpm
Dynamic load	37.1 kN
Static load	76.5 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE