


Drawn cup roller bearing BA348-Z-IKO - BA348-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba348-z-iko>

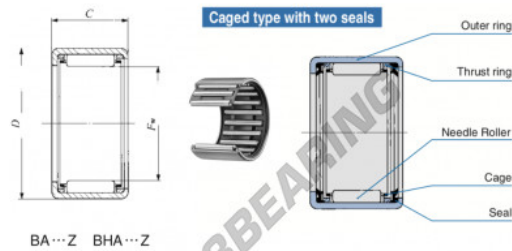

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
F_w	D	C	d_1	d_2	Housing bore dia. d_3	C	C ₀		
			Max.	Min.	Max.	Min.	N	N	rpm
53.975 (2.12)	63.500 (2.500)	12.701 (500)	2.6				16100	26600	5500

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601612
Inside diameter	53.975 mm
Outside diameter	63.5 mm
Thickness	12.7 mm
Limiting speed	5500 rpm
Dynamic load	16.1 kN
Static load	26.6 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE