


## Drawn cup roller bearing BA3416-Z-IKO - BA3416-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba3416-z-iko>

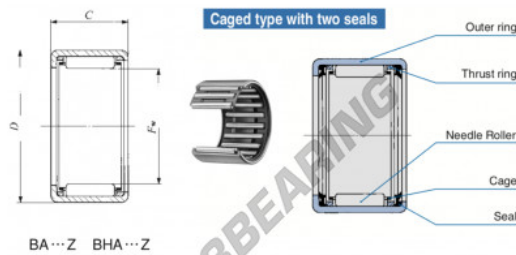

| Boundary dimensions mm(inch) |              |                | Standard mounting dimensions mm |        |        |        | Basic dynamic load rating | Basic static load rating | Allowable rotational speed | Assembled inner ring |
|------------------------------|--------------|----------------|---------------------------------|--------|--------|--------|---------------------------|--------------------------|----------------------------|----------------------|
| $F_w$                        | $D$          | $C$            | $d$                             | $H_0$  | $JT$   | $C$    | $C_0$                     | rpm                      |                            |                      |
| 53.975 (2.12)                | 63.500 (2.5) | 25.400 (1.000) | 2.8                             | 53.975 | 53.996 | 63.516 | 63.488                    | 5500                     | 62500                      | 5500 (RB 3618)       |

### PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060601629 |
| Inside diameter  | 53.975 mm     |
| Outside diameter | 63.5 mm       |
| Thickness        | 25.4 mm       |
| Limiting speed   | 5500 rpm      |
| Dynamic load     | 38.7 kN       |
| Static load      | 82.5 kN       |
| Packaging        | 1             |

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE