


## Drawn cup roller bearing BA68-Z-IKO - BA68-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba68-z-iko>

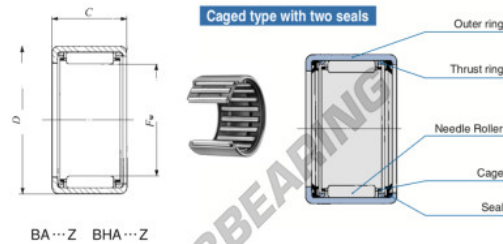

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable speed	Assembled inner ring
$F_w$	$D$	$C$	$d_2$	$td$	$d_1$	$d_2$	$C$	$C_0$	rpm	
			Max	Max	Min	Max	Min	N	N	rpm
9.525 (3/8)	14.288 (1/2)	12.7 (1/2)	1	9.525	9.516	14.288	14.280	4.19	4560	40000

### PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601773
Inside diameter	9.525 mm
Outside diameter	14.288 mm
Thickness	12.7 mm
Limiting speed	40000 rpm
Dynamic load	4.19 kN
Static load	4.56 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE