


Drawn cup roller bearing BA68-Z-IKO - BA68-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba68-z-iko>

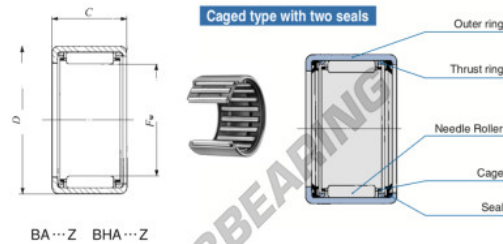

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable speed	Assembled inner ring	Assembled outer ring
F_w	D	C	d_2	td	d_1	d_2	C	C_0	rpm		
9.525 (3/8)	14.288 (9/16)	12.7 (5/8)	1	9.525	9.516	14.288	14.280	4.19	4500	40000	—

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060601773
Inside diameter	9.525 mm
Inside diameter	3/8" inch
Outside diameter	14.288 mm
Outside diameter	9/16" inch
Thickness	12.7 mm
Thickness	1/2" inch
Limiting speed	40000 rpm
Dynamic load	4.19 kN
Static load	4.56 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE