


## Drawn cup roller bearing BA105-Z-IKO - BA105-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba105-z-iko>

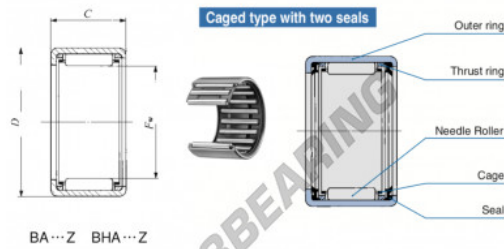

BA...Z BHA...Z

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable inner ring speed	Assembled	
<i>F<sub>w</sub></i>	<i>D</i>	<i>C</i>	<i>l<sub>2</sub></i>	<i>h<sub>2</sub></i>	Housing bore dia. <i>J<sub>T</sub></i>	<i>C</i>	<i>C<sub>0</sub></i>	rpm	inner ring	
	Max.	Max.	Min.	Max.	Max.	Min.	N	N		
15.875 (5/8)	20.638 (81/64)	7.92 (31/32)	1.3				2870	3220	25000	-

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060602947
Inside diameter	15.875 mm
Outside diameter	20.638 mm
Thickness	7.92 mm
Limiting speed	25000 rpm
Dynamic load	2.87 kN
Static load	3.22 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE