


Drawn cup roller bearing BA1012-Z-IKO - BA1012-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1012-z-iko>

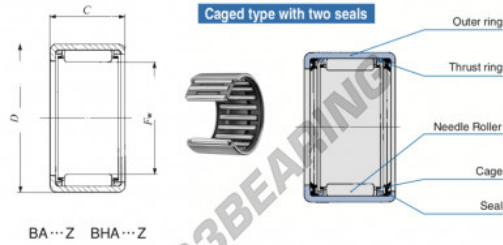

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
<i>F₀</i>	<i>D</i>	<i>C</i>	<i>d2</i>	<i>h6</i>	Housing bore dia. <i>H7</i>	<i>C</i>	<i>C0</i>	rpm		
15.875 (5/8)	20.638 (81/64)	19.05 (750)	1.3	15.875 (5/8)	19.264	20.625 (81/64)	20.625 (81/64)	9000	14100	25000 (RB 612-1)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060602978
Inside diameter	15.875 mm
Outside diameter	20.638 mm
Thickness	19.05 mm
Limiting speed	25000 rpm
Dynamic load	9.02 kN
Static load	14.1 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE