


Drawn cup roller bearing BA86-Z-IKO - BA86-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba86-z-iko>

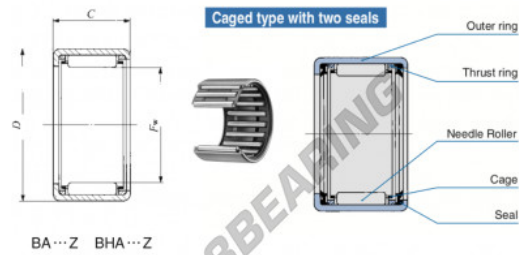

| Boundary dimensions mm(inch) | | | Standard mounting dimensions mm | | | | Basic dynamic load rating | Basic static load rating | Allowable rotational speed(I) | Assembled inner ring |
|------------------------------|---------------|-------------|---------------------------------|--------|--------|--------|---------------------------|--------------------------|-------------------------------|----------------------|
| F_w | D | C | d_2 | H_1 | J | C | C_0 | n | n_0 | |
| | | | Min. | Max. | Min. | Max. | | rpm | | |
| 13,708 (0.21) | 17,462 (0.68) | 9,520 (375) | 11,112 | 11,501 | 17,472 | 17,454 | 3470 | 3850 | 30000 | |

PRODUCT FEATURES

| | |
|------------------|---------------|
| Brand | IKO |
| N° Ean13 | 3616060603067 |
| Inside diameter | 12.7 mm |
| Outside diameter | 17.462 mm |
| Thickness | 9.52 mm |
| Limiting speed | 30000 rpm |
| Weight | 5 g |
| Dynamic load | 3.47 kN |
| Static load | 3.85 kN |
| Packaging | 1 |

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE