


Drawn cup roller bearing BA118-Z-IKO - BA118-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba118-z-iko>

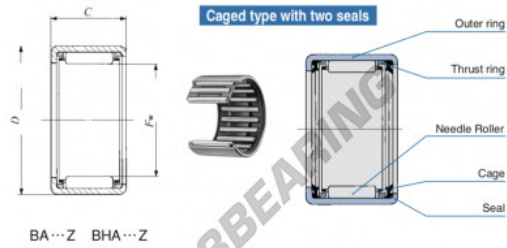

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed ⁽¹⁾	Assembled inner ring	
<i>F_W</i>	<i>D</i>	<i>C</i>	<i>r₂</i>	<i>r₁</i>	<i>r₁</i>	<i>C</i>	<i>C₀</i>	<i>n</i>		
	Max.	Max.	Min.	Max.	Min.	N	N	rpm	RB 88	
17.462 (1116)	22.225 (8. 8)	12.726 (500)	1.3	17.462	17.451	22.227	22.216	6140	8855	25000

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603128
Inside diameter	17.462 mm
Outside diameter	22.225 mm
Thickness	12.7 mm
Limiting speed	25000 rpm
Dynamic load	6.14 kN
Static load	88.5 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE