


## Drawn cup roller bearing BA1110-Z-IKO - BA1110-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1110-z-iko>

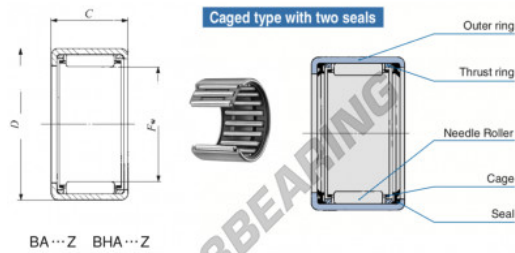

BA...Z BHA...Z

Boundary dimensions mm(inch)		Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring
$F_w$	D	C	$d$	$H$	$H_1$	C	C <sub>0</sub>	(rpm)	
17.462 (0.687)	22.225 (0.875)	15.88 (0.625)	1.3	17.462 (0.687)	17.461 (0.687)	8.28	13000	25000	—

## PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603135
Inside diameter	17.462 mm
Inside diameter	11/16" inch
Outside diameter	22.225 mm
Outside diameter	7/8" inch
Thickness	15.88 mm
Thickness	5/8" inch
Limiting speed	25000 rpm
Dynamic load	8.28 kN
Static load	13 kN
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE