


Drawn cup roller bearing BA1210-Z-IKO - BA1210-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1210-z-iko>

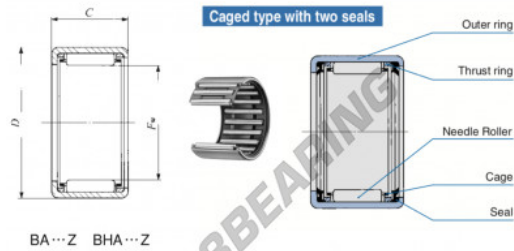

Boundary dimensions mm(inch)			Standard mounting dimensions mm			Basic dynamic load rating	Basic static load rating	Allowable rotational speed	Assembled inner ring		
F_w	D	C	d_2	H	J	C'	C_0	(rpm)			
19,050 (0.74)	25,400 (1)	15,881 (0.625)	1,3	19,050	19,037	Max. 25,412	Min. 25,391	9000	13200	20000	RB 110-1

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603173
Inside diameter	19.05 mm
Inside diameter	3/4" inch
Outside diameter	25.4 mm
Outside diameter	1" inch
Thickness	15.88 mm
Thickness	5/8" inch
Limiting speed	20000 rpm
Dynamic load	9.5 kN
Static load	13.2 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE