


Drawn cup roller bearing BA1212-Z-IKO - BA1212-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1212-z-iko>

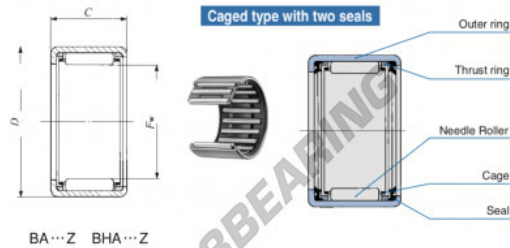

Boundary dimensions mm(inch)	Standard mounting dimensions mm				Basic dynamic load rating		Basic static load rating		Allowable speed (1)	Assembled inner ring
	D	C	r2	h6	Shaft dia.	Housing bore dia.	C	C0		
19.050 (0.4)	25.400 (1)	19.050 (0.750)	1.3	19.050 (0.750)	19.037	25.412 (1.001)	25.391	11900	17700	20000 (RB #12-1)

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603180
Inside diameter	19.05 mm
Outside diameter	25.4 mm
Thickness	19 mm
Limiting speed	20000 rpm
Dynamic load	11 kN
Static load	17 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE