


Drawn cup roller bearing BA1310-Z-IKO - BA1310-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1310-z-iko>

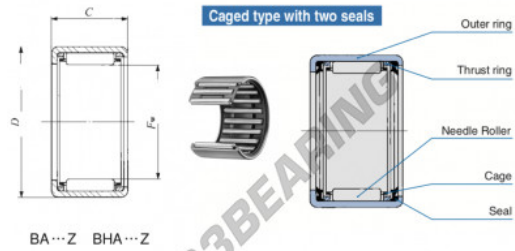

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable inner ring speed	Assembled inner ring
<i>F₀</i>	<i>D</i>	<i>C</i>	<i>i2</i>	<i>h6</i>	<i>H7</i>	<i>C</i>	<i>C0</i>	rpm		
25.638 (10.110)	26.988 (1.111)	15.881 (625)	1.3	20.630	20.625	27.010 (26.975)	9.870	14200	19000 (R8 B10)	

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603234
Inside diameter	20.638 mm
Outside diameter	26.988 mm
Thickness	15.88 mm
Limiting speed	19000 rpm
Dynamic load	9.87 kN
Static load	14.2 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE