


## Drawn cup roller bearing BA1314-Z-IKO - BA1314-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba1314-z-iko>

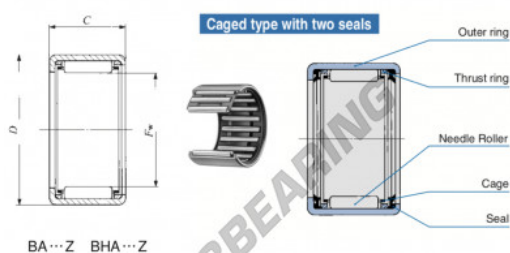

| Boundary dimensions mm(inch) |                |               |                | Standard mounting dimensions mm |                         |        |                | Basic dynamic load rating | Basic static load rating | Allowable rotational speed <sup>(1)</sup> | Assembled inner ring |
|------------------------------|----------------|---------------|----------------|---------------------------------|-------------------------|--------|----------------|---------------------------|--------------------------|-------------------------------------------|----------------------|
| P <sub>10</sub>              | D              | C             | r <sub>2</sub> | drift dia.<br>H7                | Housing bore dia.<br>H7 | C      | C <sub>1</sub> | N                         | N                        | rpm                                       |                      |
| 20.638 (0.810)               | 26.988 (1.063) | 22.22 (0.875) | 1.3            | 20.638                          | 20.625                  | 27.000 | 26.979         | 14700                     | 23850                    | 19000                                     | RB 914               |

## PRODUCT FEATURES

|                  |               |
|------------------|---------------|
| Brand            | IKO           |
| N° Ean13         | 3616060603258 |
| Inside diameter  | 20.638 mm     |
| Outside diameter | 26.988 mm     |
| Thickness        | 22.22 mm      |
| Limiting speed   | 19000 rpm     |
| Dynamic load     | 14.7 kN       |
| Static load      | 23.8 kN       |
| Packaging        | 1             |

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE