


Drawn cup roller bearing BA146-Z-IKO - BA146-Z-IKO

<https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/ba146-z-iko>

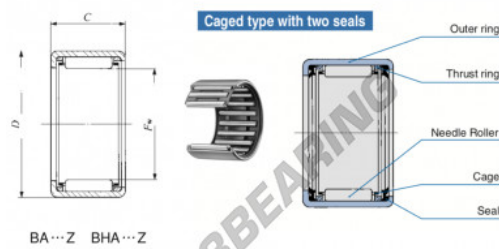

Boundary dimensions mm(inch)			Standard mounting dimensions mm				Basic dynamic load rating	Basic static load rating	Allowable rotational speed(r/min)	Assembled inner ring
Fw	D	C	Shaft dia. d		Housing bore dia. D1		C	CF	rpm	
			Max.	Min.	Max.	Min.				
22.225 (A 8)	26.975 (1 1/8)	9.52 (.375)	22.225	22.212	26.987	26.969	5430	6740	18000	IRB 106

PRODUCT FEATURES

Brand	IKO
N° Ean13	3616060603289
Inside diameter	22.225 mm
Outside diameter	26.988 mm
Thickness	9.52 mm
Limiting speed	18000 rpm
Dynamic load	5.43 kN
Static load	6.74 kN
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE