


## Tapered roller bearing 46220A-JTEKT - 46220A-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/46220a-jtekt>

Double-row tapered roller bearings ———— **Koyo**  
TDO type

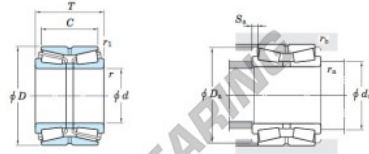

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
$d$	$D$	$T$	$C$	$r_1$ min.	$r_2$ min.	$C_r$	$C_{0r}$	Grease lub.	Oil lub.
100	150	46	37	2	0.6	180	293	1 900	2 500

Bearing No.	Mounting dimensions (mm)					Con- stant $e$	Axial load factors			Refer.) Mass (kg)
	$d_a$ min.	$D_a$ min.	$S_a$ min.	$r_a$ max.	$r_b$ max.		$Y_2$	$Y_3$	$Y_0$	
46220A	110	142	4.5	2	0.6	0.35	1.95	2.90	1.91	2.53

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250133022
Inside diameter	100 mm
Outside diameter	150 mm
Thickness	37 mm
2nd Thickness	46 mm
Weight	2530 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE