


## Tapered roller bearing 462-500-JTEKT - 462-500-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/462-500-jtekt>

Double-row tapered roller bearings Koyo  
TDO type

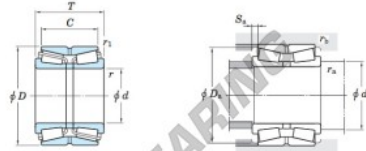

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
d	D	T	C	r <sub>1</sub> min.	r <sub>1</sub> max.	C <sub>r</sub>	C <sub>0r</sub>	Grease lub.	Oil lub.
500	720	167	149	6	3	2 580	5 690	250	330

Bearing No.	Mounting dimensions (mm)					Constant e	Axial load factors			Refer.) Mass (kg)
	d <sub>a</sub> min.	D <sub>a</sub> min.	S <sub>d</sub> min.	r <sub>a</sub> max.	r <sub>b</sub> max.		Y <sub>2</sub>	Y <sub>3</sub>	Y <sub>0</sub>	
462/500	528	679	9	5	2.5	0.40	1.71	2.54	1.67	210

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952481692
Inside diameter	500 mm
Inside diameter	19.685" inch
Outside diameter	720 mm
Outside diameter	28.346" inch
Thickness	149 mm
Thickness	5.866" inch
2nd Thickness	167 mm
2nd Thickness	6.575" inch
Weight	210000 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE