


## Tapered roller bearing 45228-JTEKT - 45228-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45228-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

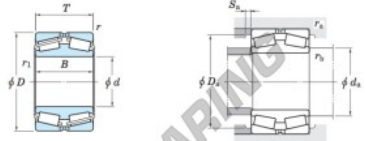

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> <sub>1</sub> max.	<i>C</i> <sub>r</sub>	<i>C</i> <sub>0r</sub>	Grease lub.	Oil lub.
140	210	53	53	2	2.5	311	564	1300	1800

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> min.	<i>S</i> <sub>a</sub> min.	<i>r</i> <sub>a</sub> max.	<i>r</i> <sub>b</sub> max.		<i>Y</i> <sub>2</sub>	<i>Y</i> <sub>3</sub>	<i>Y</i> <sub>0</sub>	
45228	159	200	188	4	2	2	0.27	2.47	3.67	2.41	6.45

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250130472
Inside diameter	140 mm
Outside diameter	210 mm
Thickness	53 mm
Weight	6450 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE