


## Tapered roller bearing 45232-JTEKT - 45232-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45232-jtekt>

Double-row tapered roller bearings  
TDI type Koyo

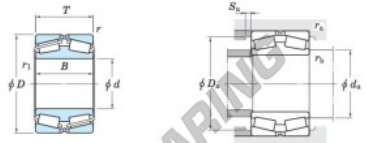

Boundary dimensions (mm)					Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )		
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> max.	<i>r</i> min.	<i>C<sub>r</sub></i>	<i>C<sub>0r</sub></i>	Grease lub.	Oil lub.
160	240	60	60	2.5	3	421	705	1 100	1 500

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d<sub>a</sub></i> max.	<i>D<sub>a</sub></i> max.	<i>D<sub>a</sub></i> min.	<i>S<sub>a</sub></i> min.	<i>r<sub>a</sub></i> max.	<i>r<sub>b</sub></i> max.		<i>Y<sub>2</sub></i>	<i>Y<sub>3</sub></i>	<i>Y<sub>0</sub></i>	
45232	184	228	217	5	2	2.5	0.24	2.79	4.15	2.73	9.22

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	4549250130496
Inside diameter	160 mm
Inside diameter	6.299" inch
Outside diameter	240 mm
Outside diameter	9.449" inch
Thickness	60 mm
Thickness	2.362" inch
Weight	9220 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE