


## Tapered roller bearing 45288-JTEKT - 45288-JTEKT

<https://www.123bearing.com/bearing-housing/roller-bearing/tapered/45288-jtekt>

Double-row tapered roller bearings — Koyo  
TDI type

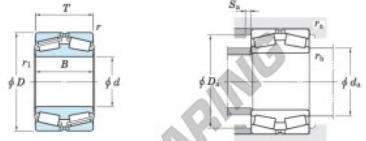

Boundary dimensions (mm)						Basic load ratings (kN)		Limiting speeds (min <sup>-1</sup> )	
<i>d</i>	<i>D</i>	<i>B</i>	<i>T</i>	<i>r</i> <sub>max.</sub>	<i>r</i> <sub>1 min.</sub>	<i>C</i> <sub>r</sub>	<i>C</i> <sub>0r</sub>	Grease lub.	Oil lub.
440	650	157	157	6	6	2 750	5 500	300	390

Bearing No.	Mounting dimensions (mm)						Con- stant <i>e</i>	Axial load factors			(Refer.) Mass (kg)
	<i>d</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> max.	<i>D</i> <sub>a</sub> min.	<i>S</i> <sub>a</sub> min.	<i>r</i> <sub>a</sub> max.	<i>r</i> <sub>b</sub> max.		<i>Y</i> <sub>2</sub>	<i>Y</i> <sub>3</sub>	<i>Y</i> <sub>0</sub>	
45288	500	622	592	10	5	5	0.28	2.43	3.61	2.37	182

### PRODUCT FEATURES

Brand	JTEKT
N° Ean13	3663952482163
Inside diameter	440 mm
Outside diameter	650 mm
Thickness	157 mm
Weight	182000 g
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE