Drawn cup roller bearing
BAM1412-IKO - BAM1412-IKO

https://www.123bearing.com/bearing-housing/needle-roller-bearing/drawn-cup/bam1412-iko

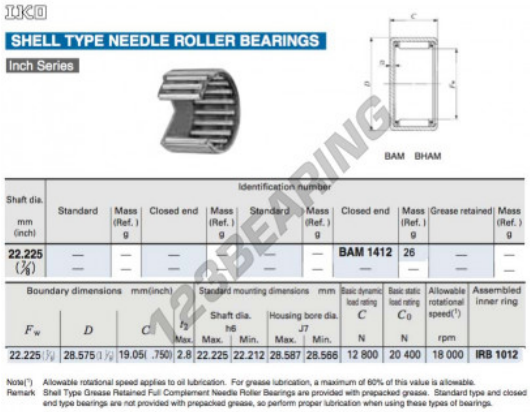

IKO

SHELL TYPE NEEDLE ROLLER BEARINGS

Inch Series

BAM BHAM

Shaft dia. mm (inch)	Identification number: Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Standard	Mass (Ref.) g	Closed end	Mass (Ref.) g	Grease retained	Mass (Ref.) g
22.225 (7/8)	— —	— —	— —	— —	— —	— —	BAM 1412 —	26 —	— —	— —

Boundary dimensions mm(inch) F_w	D	C	r_s Max.	Standard mounting dimensions mm: Shaft dia. h6 Max.	Shaft dia. h6 Min.	Housing bore dia. J7 Max.	Housing bore dia. J7 Min.	Basic dynamic load rating C N	Basic static load rating C_0 N	Allowable rotational speed(1) rpm	Assembled inner ring
22.225 (7/8)	28.575 (1 1/8)	19.05 (.750)	2.8	22.225	22.212	28.587	28.566	12 800	20 400	18 000	IRB 1012

Note(1) Allowable rotational speed applies to oil lubrication. For grease lubrication, a maximum of 60% of this value is allowable.
Remark Shell Type Grease Retained Full Complement Needle Roller Bearings are provided with prepacked grease. Standard type and closed end type bearings are not provided with prepacked grease, so perform proper lubrication when using these types of bearings.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952173139
Inside diameter	22.23 mm
Inside diameter	7/8" inch
Outside diameter	28.58 mm
Outside diameter	1 1/8" inch
Thickness	19.05 mm
Thickness	3/4" inch
Packaging	1

contact@123bearing.com
(646) 712 9672
CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE