


Yoke type track roller CRY36-VUU-IKO - CRY36-VUU-IKO

<https://www.123bearing.com/bearing-housing/roller-bearing/yoke-track-roller/cry36-vuu-iko>

IKO
ROLLER FOLLOWERS
Non-separable Roller Followers, Inch Series **Full Complement Type /With Inner Ring**

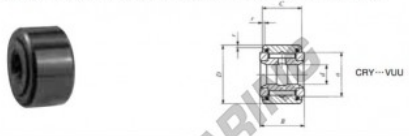

Shaft dia. mm (inch)	Identification number		Mass (Ref.) g	Boundary dimensions: mm(inch)				
	Shield type Cylindrical outer ring	Sealed type Cylindrical outer ring		d	D	B	C	
15.875 (5/8)	CRY 36 VUU		599	15.875 (5/8)	57.150 (2 1/4)	33.338 (1.3125)	31.750 (1 1/4)	
		Shaft dia.			Basic dynamic load rating C		Basic static load rating C ₀	
		Push fit		Drive fit		Press fit		
		Min.	Max.	Min.	Max.	Min.	Max.	
36.0 (1.417)	1.588 (5/8)	15.857	15.867	15.873	15.883	15.883	15.893	
							45 700	80 600

Remarks: 1. The inner ring has an oil hole.
2. Provided with prepacked grease.

PRODUCT FEATURES

Brand	IKO
N° Ean13	3663952398228
Inside diameter	15.875 mm
Outside diameter	57.15 mm
Thickness	33.338 mm
Packaging	1

contact@123bearing.com

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE