

## TAPR Rod end GIHN-K-32LO-DURBAL - GIHN-K-32LO-DURBAL


<https://www.123bearing.com/bearing-housing/rod-end/tapr/gihn-k-32lo-durbal>

### GIHN-K-32LO



**Description:** Hydraulic rod end with slot and clamping arrangement. Made of spherical plain bearing DGE. LO pressed into rod end housing. Sliding combination steel / steel with grease nipple.

\* without grease nipple

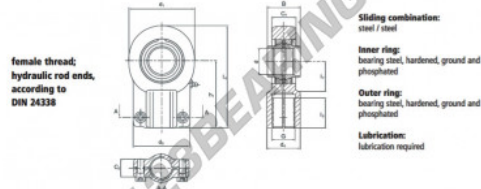

female thread;  
hydraulic rod ends,  
according to  
DIN 24338

Sliding combination:  
steel / steel

Inner ring:  
bearing steel, hardened, ground and  
phosphated

Outer ring:  
bearing steel, hardened, ground and  
phosphated

Lubrication:  
lubrication required

order number	d	d <sub>1</sub>	measurement [mm]	G	d <sub>2</sub>	B	C <sub>1</sub>	C <sub>2</sub>
GIHN-K 32 LO	32	71	M 27 x 2	38,0	66	32	28	22

type	l <sub>1</sub> min	measurement [mm]	l <sub>2</sub>	l <sub>1</sub>	load rating	weight
		h <sub>1</sub>	l <sub>2</sub>		C <sub>0</sub> [kN]	[kg]
GIHN-K / GIHN-KL 32 LO	37	80	118,5	32	114,0	1,20

## PRODUCT FEATURES

Brand	DURBAL
N° Ean13	3663952500188
Inside diameter	32 mm
Outside diameter	71 mm
Thickness	28 mm
Type	TAPR
Weight	1200 g
Thread	Right-hand thread
Lubrication	with
Packaging	1

[contact@123bearing.com](mailto:contact@123bearing.com)

(646) 712 9672

CRT4 de Lesquin 60 Rue Du Haut De Sainghin 59273 Fretin FRANCE